
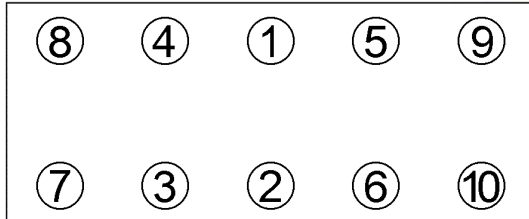


<b>Anziehvorschrift für Zylinderkopf</b>	<b>456.710</b>	 Das Original
<b>Tightening Instructions for Cylinder Head</b>		
<b>Instructions de serrage pour culasse</b>		
<b>Prescripciones de apriete para culatas</b>		
	passend für / suitable for adaptable à / adaptable a	<b>Renault</b>

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



Anziehen/ Tightening/ Serrage/ Apriete	* ▶	Clio, Twingo, Modus 25 Nm 25 Nm 270° ±10°	* ▶	Kangoo 25 Nm 25 Nm 225° ±10°
-------------------------------------------------	--------	----------------------------------------------------	--------	---------------------------------------

Zeichenerklärung / Explanations / Explication / Explicacion

* ★ □ ● ▶	neue Zylinderkopf- schrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
	Setzzeit	relaxation time	durée de tassement	tiempo de espera
	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

Ø: 77,5 mm;  $\pm$ : 0,9 mm

Mot: K9K 714, 718, 740, 766, 768, 800  
1,5 ltr. dCi  
47-63 kW (64-86 PS)

Clio, Twingo, Modus, Kangoo

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*456.710\***