

FRICION
MATERIAL

CV DISC
BRAKE PAD



FRICION MATERIAL FER4569

Description

A moulded, asbestos free, friction material containing friction modifiers and randomly dispersed reinforcing fibres in a phenolic matrix.


Physical & Technical Properties

Specific Gravity

3.15 g/cm³

Min. Shear Strength

250 N/cm²

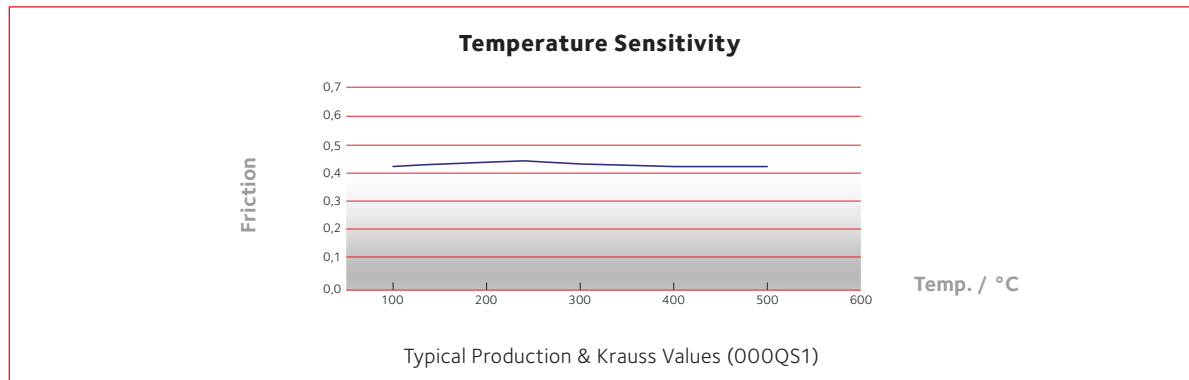

Operating Conditions

Max. Rubbing Pressure

P = 800 N/cm²

Max. Continuous Temperature

T = 350 °C

Max. Rubbing Speed

V = 30 m/s

Max. Short Term Temperature

T = 800 °C

Important Safety Note

This material is used on pads for different types and sizes of Air Actuated Disc Brakes. It is mandatory for safety reasons to comply with recommendations specific to each brake type regarding disc type, thickness and inspection, along with Disc Pad Replacement procedure, including brake adjustment and bedding.

DATA SHEET FER4569



www.ferodo.com

The Ferodo brand is a registered trademark of FEDERAL-MOGUL MOTORPARTS

PR/MFE/1329-EN