


DONNEES TECHNIQUES

Length [mm]	615
Number of splines (wheels side)	33
Number of Teeth, ABS ring	45
	for vehicles with ABS
ABS Ring Ø [mm]	81
(wheels side) shoulder Ø [mm]	53
ABS ring type	W
(wheels side) CV Joint Ø [mm]	90
(gearbox side) CV Joint Ø [mm]	100
Number of mounting bores	6
Ø mounting holes [mm]	8

PHOTOS

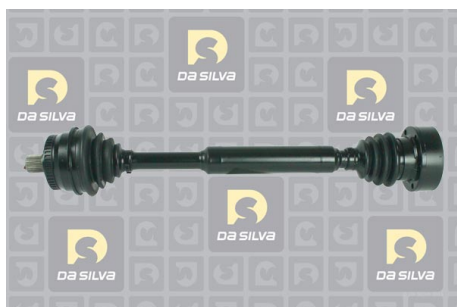

DOCUMENTS

BT-100	Conseils de montage des cardans
BT-104	Soufflets et Triaxes FIAT
BT-105	Soufflets et Triaxes SEAT
BT-131	Refus des carcasses transmissions

APPLICATIONS

AUDI		
A4 (94-01) (8D2, B5) - 1.6	102 ch	07.2000 > 11.2000
	100 ch	01.1995 > 07.2000
A4 (94-01) (8D2, B5) - 1.8	129 ch	01.1995 > 11.2000
A4 (94-01) (8D2, B5) - 1.8 quattro	125 ch	01.1995 > 11.2000
A4 (94-01) (8D2, B5) - 1.8 T quattro	150 ch	01.1995 > 11.2000
A4 (94-01) Avant (8D5, B5) - 1.6	102 ch	07.2000 > 09.2001
	100 ch	03.1996 > 07.2000
A4 (94-01) Avant (8D5, B5) - 1.8 quattro	125 ch	01.1996 > 09.2001
A4 (94-01) Avant (8D5, B5) - 1.8 T quattro	150 ch	01.1996 > 09.2001
A4 (01-05) (8E2, B6) - 1.6	102 ch	11.2000 > 12.2004
A4 (01-05) Avant (8E5, B6) - 1.6	102 ch	09.2001 > 12.2004
VOLKSWAGEN		
PASSAT (96-00) (3B2) - 1.6	101 ch	10.1996 > 11.2000
PASSAT (96-00) Variant (3B5) - 1.6	101 ch	06.1997 > 11.2000
PASSAT (00-05) (3B3) - 1.6	102 ch	11.2000 > 05.2005
PASSAT (00-05) (3B3) - 2.0 4motion	115 ch	11.2000 > 05.2005
PASSAT (00-05) Variant (3B6) - 1.6	102 ch	11.2000 > 05.2005
PASSAT (00-05) Variant (3B6) - 2.0 4motion	115 ch	11.2000 > 05.2005

 Avant montage, comparez la pièce reçue à celle d'origine afin de vérifier que la bonne pièce a été choisie et peut être montée sur le véhicule. Le non-respect de cette consigne ou des instructions de montage annule la garantie.